


WIREWINDER PAY-OFF AND TAKE-UP

The Wirewinder Pay-Off and Take-Up are sturdy but lightweight units that can handle a wide range of spool sizes and wire types.

The Take-Up is electronically powered, wired for various accessories and features a fully adjustable levelwind.

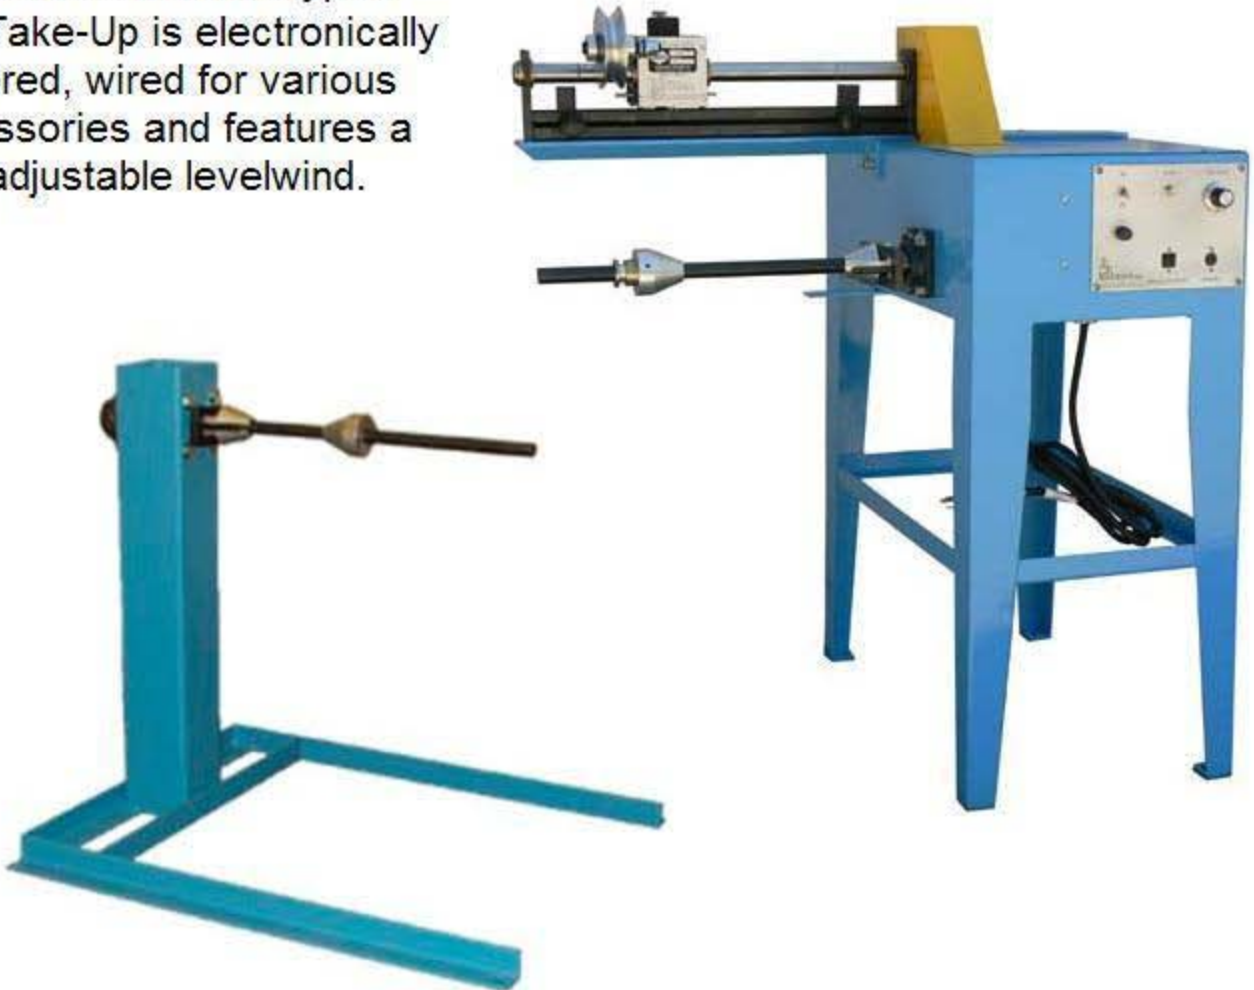


WIREWINDER

PAY-OFF FEATURES:

- SPOOL SIZES: 6" to 18" O.D., 3/4" to 2 1/8" core hole diameters, 70 pounds maximum. 3/4" shaft with cone.
- MECHANICALLY ADJUSTABLE TENSION.
- LIGHTWEIGHT BOLT-DOWN

PAY-OFF SPECIFICATIONS:

- DIMENSIONS: 25" long, 27" wide, 32" high.
- WEIGHT: Approximately 65 pounds

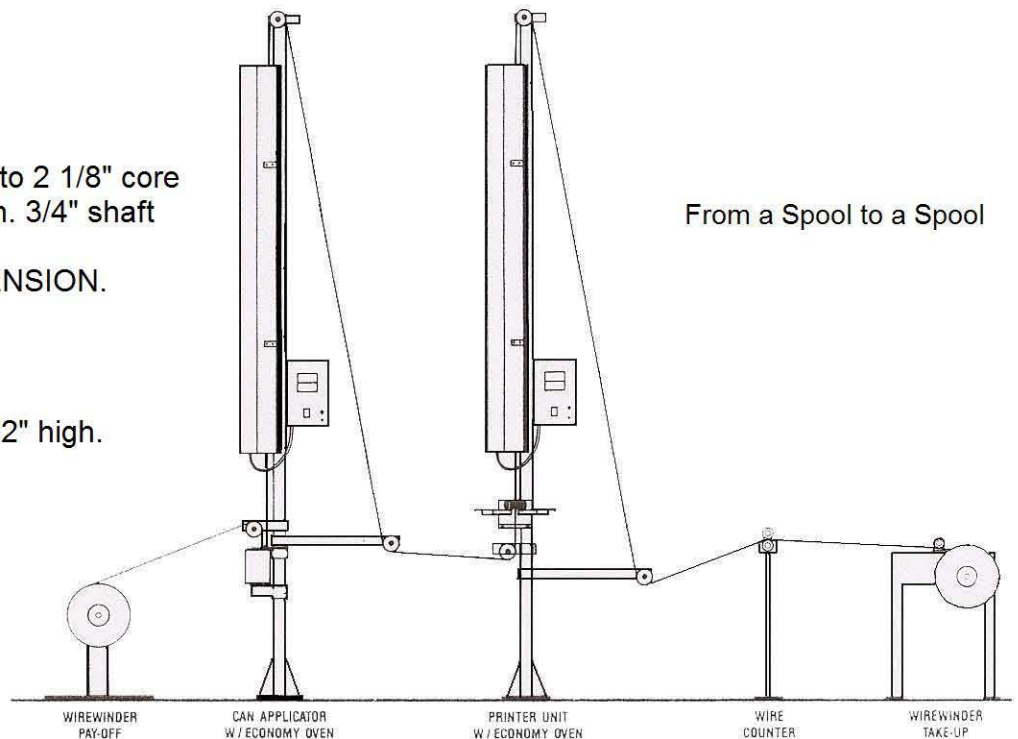

WIREWINDER

TAKE-UP FEATURES:

- SPOOL SIZES: 6" to 18" O.D., 3/4" to 2 1/8" core hole diameters. 3/4" shaft with cone.
- SHAFT SPEED: 0-360 RPM with full constant torque from 50-360 RPM. Initial wire speeds up to 188 FPM from spools with 2" diameter hubs.
- FULLY ADJUSTABLE LEVELWIND: From .029 to .234 per revolution for infinite variation of lay on take-up spool while equipment is in operation. Adjustable for various spool widths up to 14".
- PREWIRED FOR THE FOLLOWING MODULAR ACCESSORIES: Predetermined counter, wire sensor switch and insulation spark tester.

TAKE-UP ACCESSORIES:

- MODULAR PREDETERMINED COUNTER: Counts total amount of wire processed. Automatically shuts off machine at preselected footage.
- MODULAR WIRE SENSOR SWITCH: Automatically stops machine when knots and/or other defects are detected. Adjusts easily for various wire sizes.

TAKE-UP SPECIFICATIONS:

- ELECTRICAL: 115 volts AC, 10 amps, 50/60 cycles, single phase.
- DIMENSIONS: 26 1/2" long, 39 1/4" wide, 37 1/2" high.
- WEIGHT: Approximately 145 pounds.

THE WIREWINDER PAY-OFF and TAKE-UP may be used with coloring, striping and marking equipment.